


General Instructions

Eagle Eye

Basic Set-up (non-networked computer)

This picture below is a typical one computer configuration. For more information on utilizing two computers see the using Two Computers – Basic Set-up under the Eagle Eye & Hy-Tek integration tab.

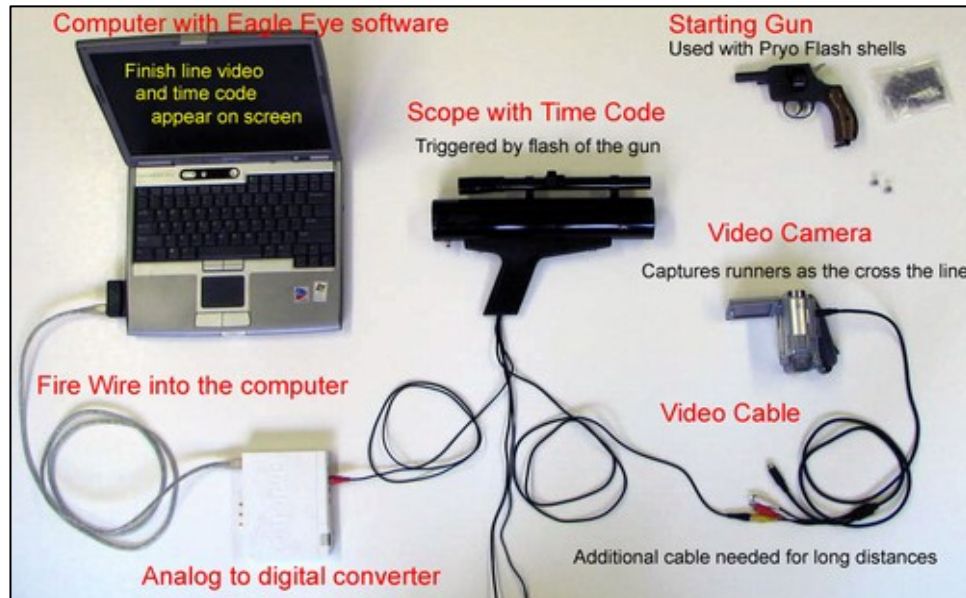

1. **Center your camera** on the finish line.
2. Turn on the Eagle Eye computer and **open Eagle Eye software**.
3. **Plug** one end of the camera's **AV adaptor cord into the camera** and the other end **into the video cable**. Use a barrel connector if necessary. (a barrel has two female ends) Note: the picture above does not show additional cable needed to run from finish line to the press box.
4. **Plug other end of video cable** (from the camera) **into the female end of the Pyro-Flash cable**.
5. **Plug** the male end of Pyro-Flash cable **into the 'Video In' on the Converter**.
6. **Turn the Converter on** and select **Analog In**.
7. **Plug the fire wire cable** from the Converter **into the computers video card**.
8. **Select Eagle Eye** from the pop-up list once your camera has been detected.
9. Select **Live Video** within the software to confirm you have a live picture. If this option is not given, click the TV icon on the bottom toolbar once the software is opened. You are now ready to begin timing your track meet.

Tip 1: For best performance use a firewire card (as shown) with the 6pin-6pin firewire cable included with your Converter - instead of a built in 4pin- 1394 firewire cable. **Tip 2:** Be sure to shut off your camera's 'sleep mode' if it has one. You want your camera to show a live picture for the duration of the track meet.